

**Specification Data** 

Column & Boom Manipulators
Light Duty Series
Range up to 2.0 x 2.0 meters
Motorized Vertical Adjustment
Motorized Horizontal Adjustment

Phone: 281-440-1725

Fax: 281-440-1724

**ML2025** 



The **Harbach Positioning** standard duty series of Column & Boom Manipulators are specifically designed and built to withstand the harsh and rugged environments expected in the welding industry. It includes the following features:

- A slewing ring for column mounting, thereby providing a smooth 360° lockable rotation.
- All vertical and horizontal rails are precisely machined in single runs giving unsurpassed smooth and steady travel
- Non powered boom arm travel via easy glide manual hand wheel adjustment
- Motorized vertical travel via AC motor complete with brake for added safety
- High tensile roller chain used for vertical travel with the addition of a counter balance system provides smooth effortless vertical travel
- IP 55 control box and low voltage pendant control station
- Standard safety feature includes anti-fall device and limit switches for all functions
- Internally trunked cabling

Light Duty Harbach Positioning Series



## **Specification Data**


Column & Boom Manipulators Range up to 2.0 x 2.0 meters

**ML2025** 

## **Optional features include:**


- Travel car, manual can be fitted for rail mounting
- X-Y slide, manual or motorized, operated via the same pendant station
- Welding power source & wire feeder controller system

All Column & Boom Manipulators are grit blasted to SA2.5 and two coats of zinc phosphate paint followed by one coat of polyurethane paint work will ensure that your investment provides you with many years of uninterrupted service.

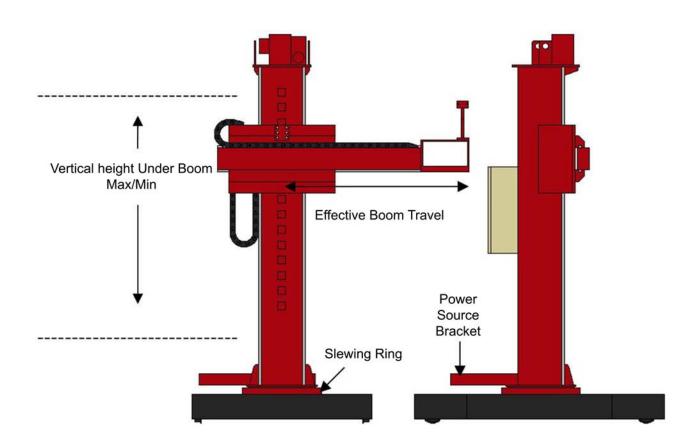

Light Duty Harbach Positioning Series

Phone: 281-440-1725 Fax: 281-440-1724

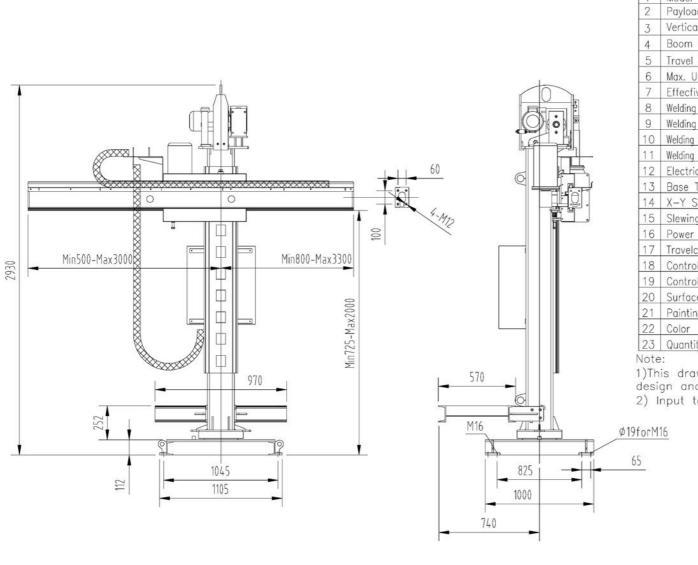

1	Model	ML2025-FM-WE-DC
2	Payload	100 kg at 300mm from the front end of boom
3	Vertical Speed	580 mm/min at 50Hz, 0.37KW c/w Brake
4	Boom Speed	317~3170mm/min, 0.37KW c/w Forced Cooling
5	Travel Speed	NA
6	Max. Under Boom Height	2000mm
7	Effective Boom Travel	2500mm
8	Welding Controller/Feeder	N.A.
9	Welding Controller Bracket	N.A.
10	Welding Power Source/Brand	N.A.
11	Welding Powersource Skid	Yes
12	Electrical Panel	Yes
13	Base Type	Floor Mounted Fixed Base
14	X-Y Slide	NA
15	Slewing Feature	Yes. Manual +/-180°
16	Power Supply	380/400/415V-3P-50Hz or 440/460/480V-3P-60Hz
17	Travelcar Rail GG	N.A.
18	Control Voltage	24Vac
19	Control Means	Via Push Button Pendant c/w 7m Cable
20	Surface Preparation	Gritblast to SA2.5
21	Painting	Lead free, 2 coats Zinc Phosphate,1 coat Polyurethane
22	Color	RAL3003 Red & RAL9005 Black for fixed base
23	Quantity	1 unit

- 1)This drawing is for illustration only and subjected to final design and site confirmation.
- 2) Input terminals are wired for 400V by default.

			C
MI	U	AC.	
			Ш
	ועי		
			l n

ALL DIMENSIONS IN MM, UNLESS OTHERWISE SPECIFIED.

REV\_DATE DESCRIPTION

CUSTOMER APPROVAL:

CHECKED BY:

DRAWN BY: IC

DRAWING NAME: Light-Duty

DRAWING NO.:

ML2025

DATE:

DATE:

DATE: 09-02-2011


REV\_DATE DESCRIPTION

CUSTOMER:

DRAWING NO.:

THE ORIGINAL AND ALL COPIES OF THIS DOCUMENT TOGETHER WITH

REV DATE	DESCRIPTION	EDIT BY	REMARKS	
CUSTOMER	CUSTOMER:			
DRAWING N	DRAWING NAME: Light-Duty Manipulator			
DRAWING N	ML2025-FM-WE-DC			
THE ORIGINAL AND ALL COPES OF THIS DOCUMENT TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF HARBACH MARKETING, INC. DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRICE NOTICE.			ESIGN AND SHEET:	

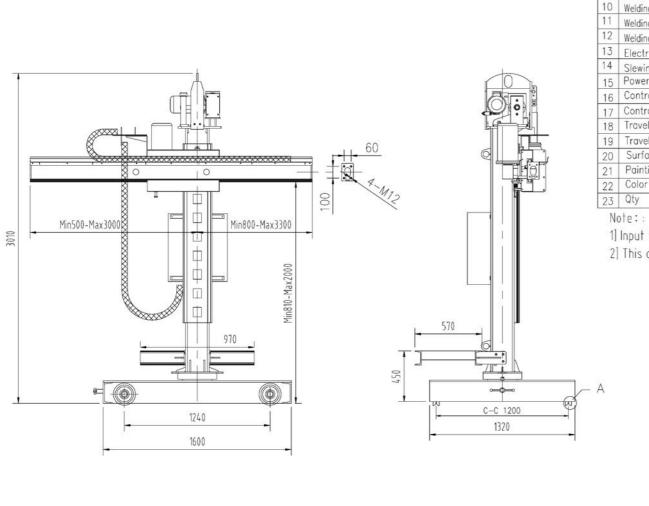


CUSTOMER APPROVAL

## Specification for Manipulator

	3	on to manipatoto		
1	Model	ML2025-MT1200-WE-DC		
2	Payload	100kg at 300mm from the front end of the boom		
3	Vertical Speed	Max. 580mm/min 0.37 kw at 50Hz with brake		
6	Boom Speed	317 to 3170 mm/min 0.37kw at 5 to 50Hz With Force Cooling		
7	Max.Under Boom Height	2000mm		
8	Effective Boom Travel	2500mm		
9	Welding Controller/Feeder	N.A.		
10	Welding Controller Bracket	N.A.		
11	Welding Powersource/Brand	N.A.		
12	Welding Powersource Skid	Yes		
13	Electrical Panel	YES		
14	Slewing Feature	Yes,Manual on slew ring		
15	Power Supply	380/400/415V-3P-50Hz or 440/460/480V-3P-60Hz		
16	Control Voltage	24V AC		
17	Control Means	Via push button pendant on 6m cable		
18	Travelcar	Yes.Manual push trolley		
19	Travelcar Rail G-G	1200mm		
20	Surface Preparation	Gritblast to SA2.5		
21	Painting	Powder coating		
22	Color	RAL3003 Red & RAL9005 Black for travelcar only		
23	Qty	1 unit		

- 1] Input terminals are wired for 400V by default.
- 2] This drawing is accurate at time of preparation and may be subjected to final design.





ALL DIMENSIONS IN MM, UNLESS OTHERWISE SPECIFIED.		REV	DATE	DESCRIPTION EDIT BY REMARKS		
	CHECKED BY:	DRAWING NAME:  DRAWING NO:	CUSTO	MER:		SCALE: N.T.S.
			DRAWI	NG NAME:	Manipulator 2.0x2.5 on Manual travelcar	
			ML2025-MT1200-WE-DC	REVISION:		
					ES OF THIS DOCUMENT TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF HARBACH MARKETING, INC. DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT	SHEET: