


### MM3030

The **Harbach Positioning** medium duty series of Column & Boom Manipulators are specifically designed and built to withstand the harsh and rugged environments expected in the welding industry. It includes the following features:

- A slewing ring for column mounting, thereby providing a smooth 360° lockable rotation.
- All vertical and horizontal rails are precisely machined in single runs giving unsurpassed smooth and steady travel.
- Latest Inverter drives fitted for variable speed of horizontal boom arm travel and rail travel car (optional).
- Worm gearbox for vertical travel via AC motor complete with brake for added safety.
- High tensile roller chain used for vertical travel with the addition of a counter balance system provides smooth effortless vertical travel.
- IP 55 control box and low voltage pendant control station.
- Standard safety feature includes anti-fall device and limit switches for all functions.
- Internally trunked cabling.

Inclusive:

- Power source mounting bracket of your choice

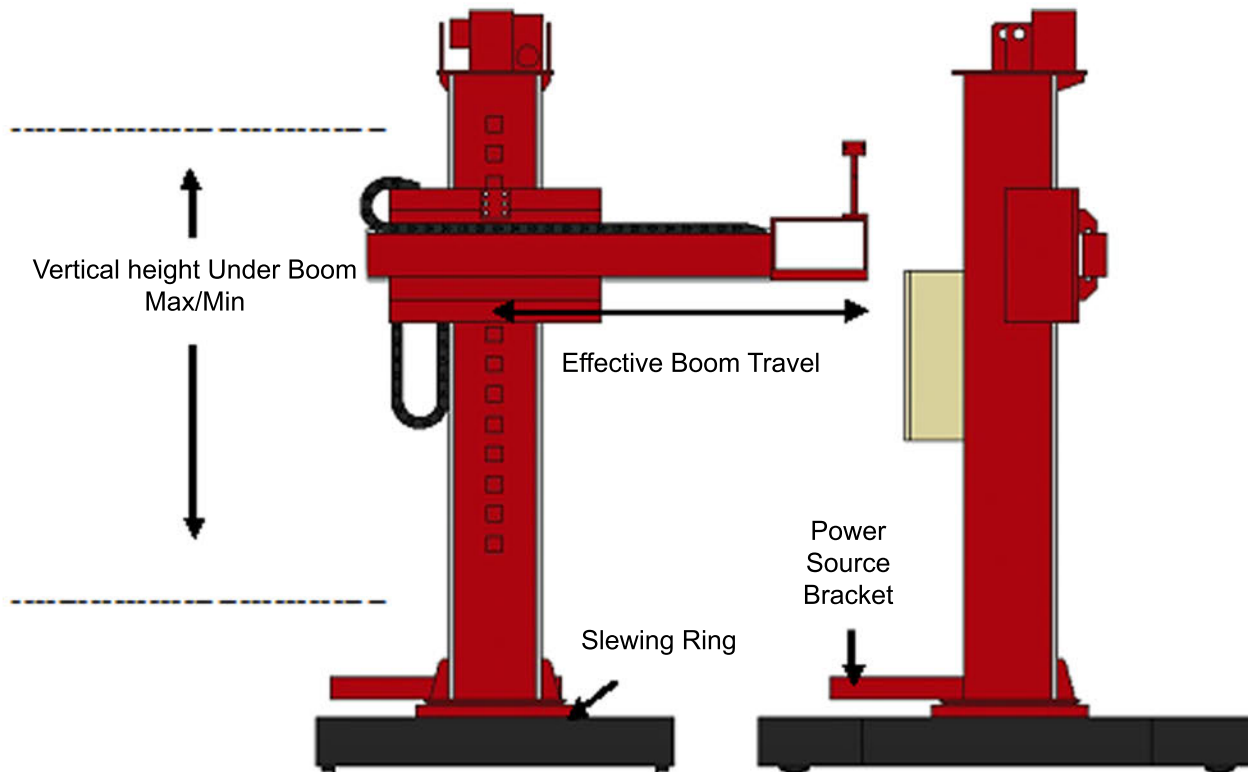

Medium Duty Harbach Positioning Series

### MM3030

#### Optional Features Includes

- Travel car, manual or motorized variable speed operated via the same pendant station via selector switch.
- X-Y slide, manual or motorized, operated via the same pendant station.
- Compressed air operated flux recovery unit
- Welding power source & wire feeder controller system

All Column & Boom Manipulators are grit blasted to SA2.5 and two coats of zinc phosphate paint followed by one coat of polyurethane paintwork will ensure that your investment provides you with many years of uninterrupted service.

#### Specification

Input Voltage: 3-Phase Voltage (Specify 3 –phase voltage requirement before ordering)			
Electrical Box: IP55 code			
Vertical Travel Speed: 750mm/min			
Boom Travel Speed: 200 to 2070 mm/min			
Carriage Travel Speed: 450 to 4500 mm/min (optional)			
Model	Effective Travel (Horizontal) mm	Height under Boom (Vertical) mm	Overall Height mm
MM2525	2500	2500	3500
MM3030	3000	3000	4000
MM3535	3500	3500	4500
MM4040	4000	4000	5000


All dimensions are subject to change without prior notice.

All speed base on 50Hz.

Please advise welding power source/welding head to be use.

#### Medium Duty Harbach Positioning Series

### MM3030

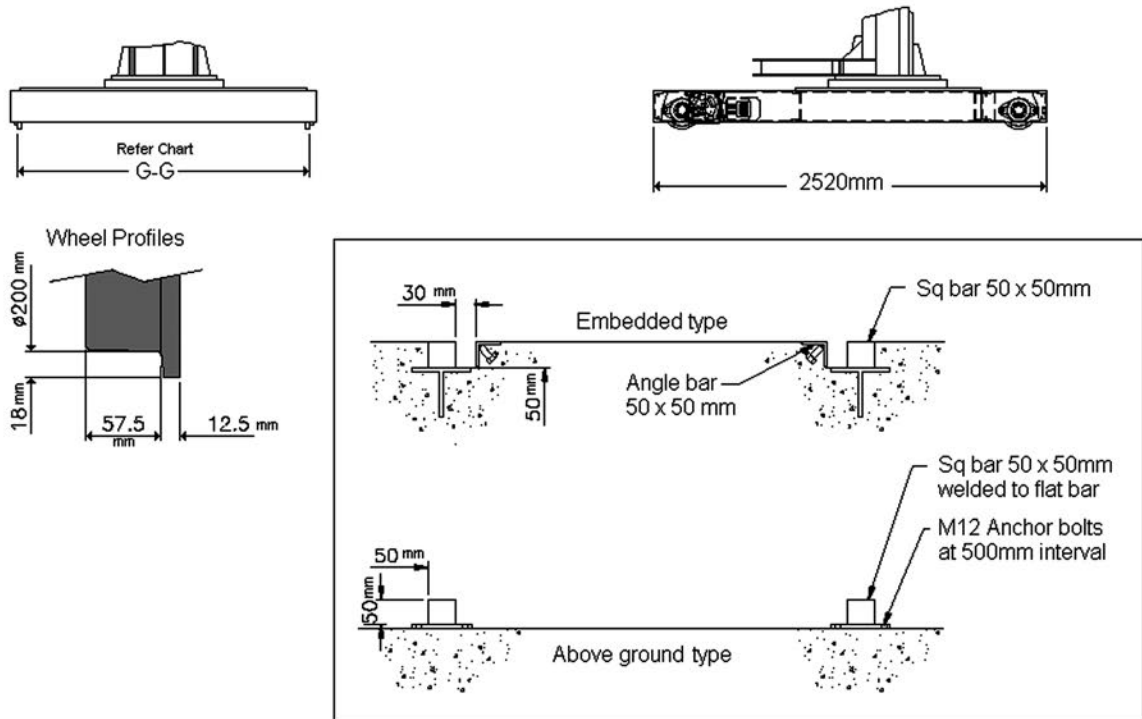

### Manipulator Rail Gauge Table

Medium Duty Type Travelcar Rails G-G in mm (250kg Payload)

#### MM series

Boom Height	2	2.5	3	3.5	4
2	GG1650	GG2000	GG2000	GG2000	GG2500
2.5					
3	GG1650	GG2000	GG2000	GG2000	GG2500
3.5	GG1650	GG2000	GG2000	GG2000	GG2500
4	GG1650	GG2000	GG2000	GG2000	GG2500

#### Notes:

V denotes Max.Under Boom Height (Vertical), in hundreds of mm. i.e. 20 = 2000mm  
H denotes Effective Boom Travel (Horizontal), in hundreds of mm. i.e. 20 = 2000mm

### Medium Duty Harbach Positioning Series

## MM3030

### Ordering Information Checklist

Equipment	Part Number	Description	
Column & Boom Manipulator	MM25/25 MM30/30 MM35/35 MM40/40	2.5 x 2.5-meter Column & Boom 3.0 x 3.0-meter Column & Boom 3.5 x 3.5-meter Column & Boom 4.0 x 4.0-meter Column & Boom (Comes with standard fixed base unless specified)	
Base	Options	Fixed base (standard) for floor mounting Travel car Manual for rail mounting Travel car Motorized for rail mounting	Standard Optional Optional
Electrical Control	Options	Panel & 3-phase AC motor Panel, step-over & 3-phase AC motor	Standard Optional

### Welding System Accessories

#### Option One

- Lincoln NA3s Controller
- K208A weld head
- Drive roll kit
- Wire reel
- 600 amps nozzle
- Cable kit Assemble
- 10 Meter ground Cable with clamp
- DC 1000 power source

#### Optional:

Rotary Clamp 1000 amp

#### Option Two

- Lincoln NA5 Controller
- K346A weld head
- Drive roll kit
- Wire reel
- 600 amps nozzle
- Cable kit Assemble
- 10 Meter ground Cable with clamp
- DC 1000 power source

#### Optional:

Rotary Clamp 1000 amp

#### Option Three

- Miller HDC 1500 Controller
- RAD weld head
- Flux hopper
- Drive roll kit (specify wire size)
- Wire straightener
- 600 amps Nozzle
- Wire reel
- Cable kit assembly
- 10 Meter ground Cable with clamp
- Dimension 1000 power source


#### Optional:

Rotary Clamp 1000 amp

### Medium Duty Harbach Positioning Series

Specifications for Manipulator

1	Model	MM3030-FM-WE
2	Max. Under Boom Height	3000mm
3	Effective Boom Travel	3000mm
4	Vertical Speed	750mm/min running at 50Hz
5	Boom Speed	200~2000mm/min running at 5~50Hz
6	Travel Speed	N.A.
7	Vertical Drive	0.75KW AC Motor c/w Brake
8	Boom Drive	0.55KW AC Motor c/w Force Cooling
9	Travel Car Drive	N.A.
10	Drive Control	0.75KW AC Inverter
11	Welding Controller/Feeder	Lincoln NA3S (by Others)
12	Welding Power Source/Brand	Lincoln DC1000 (by Others)
13	Electrical Panel	Yes
14	Base Type	Floor Mounted
15	Travel Car Rail G-G	N.A.
16	Slewing Feature	Manual, ±180°
17	Slewing Drive	N.A.
18	X-Y Slides	No
19	Operator Chair	No
20	Flux Recovery	No
21	Incoming Supply	400V-3P-50Hz
22	Control Voltage	24Vac
23	Control Means	Via Push Button Pendant c/w 8m Cable
24	Payload	200kg
25	Surface Preparation	Gritblast to SA2.5
26	Painting	2 Coats Zinc Phosphate, 1 Coat Polyurethane
27	Colour	RAL3003 Red
28	Qty	1 Unit
29	Weight	~4000kg

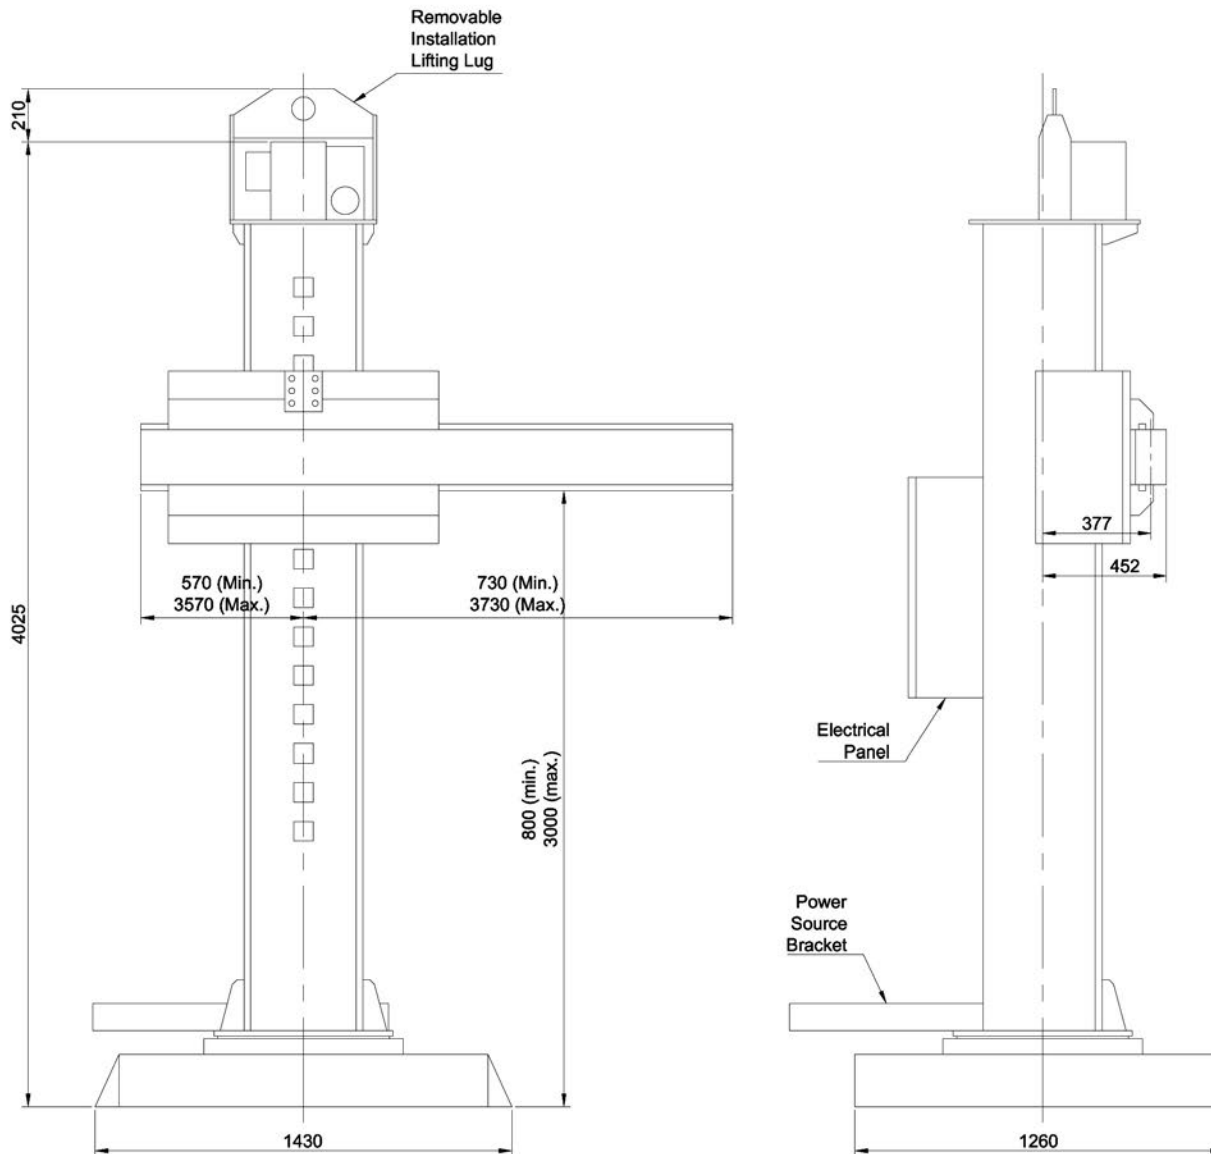

All dimensions in mm unless otherwise specified.



CUSTOMER APPROVAL

CHECKED BY:

DRAWN BY: SF

08-07-2010

1	13-12-10	As Built	IC	
REV	DATE	DESCRIPTION	EDIT BY	REMARKS
CUSTOMER:		DBL		
DRAWING NAME:		Medium Heavy Duty Manipulator	SCALE: N.T.S.	
DRAWING NO.:		PD-000006-GA02	REVISION: 1	
THE ORIGINAL AND ALL COPIES OF THIS DOCUMENT TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF HARBACH MARKETING, INC. DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.				
			SHEET: 1 OF 1	



Specifications for Manipulator

1	Model	MM3030-PT2000-WE
2	Max. Under Boom Height	3000mm
3	Effective Boom Travel	3000mm
4	Vertical Speed	750mm/min running at 50Hz
5	Boom Speed	200~2000mm/min running at 5~50Hz
6	Travel Speed	450~4500mm/min running at 5~50Hz
7	Vertical Drive	0.75KW AC Motor c/w Brake
8	Boom Drive	0.55KW AC Motor c/w Force Cooling
9	Travel Car Drive	0.75KW AC Motor c/w Brake
10	Drive Control	Inverter (Boom only)
11	Welding Controller/Feeder	T.B.A. (by Others)
12	Welding Power Source/Brand	T.B.A. (by Others)
13	Electrical Panel	Yes
14	Base Type	Travelcar
15	Travel Car Rail G-G	2000
16	Slewing Feature	Manual, ±180°
17	Slewing Drive	N.A.
18	X-Y Slides	No
19	Operator Chair	No
20	Flux Recovery	No
21	Incoming Supply	380/400/415V-3P-50Hz or 440/460/480V-3P-60Hz <sup>1</sup>
22	Control Voltage	24Vac
23	Control Means	Via Push Button Pendant c/w 8m Cable
24	Payload	200kg
25	Surface Preparation	Gritblast to SA2.5
26	Painting	2 Coats Zinc Phosphate, 1 Coat Polyurethane
27	Colour	RAL3003 Red & RAL9005 Black for Travelcar only
28	Qty	1 Unit
29	Weight	~2100kg

Note:

1. Input terminals are wired for 400V by default.
2. This drawing is accurate at the time of preparation and maybe subject to final design changes.

Rail Profile (By Client)

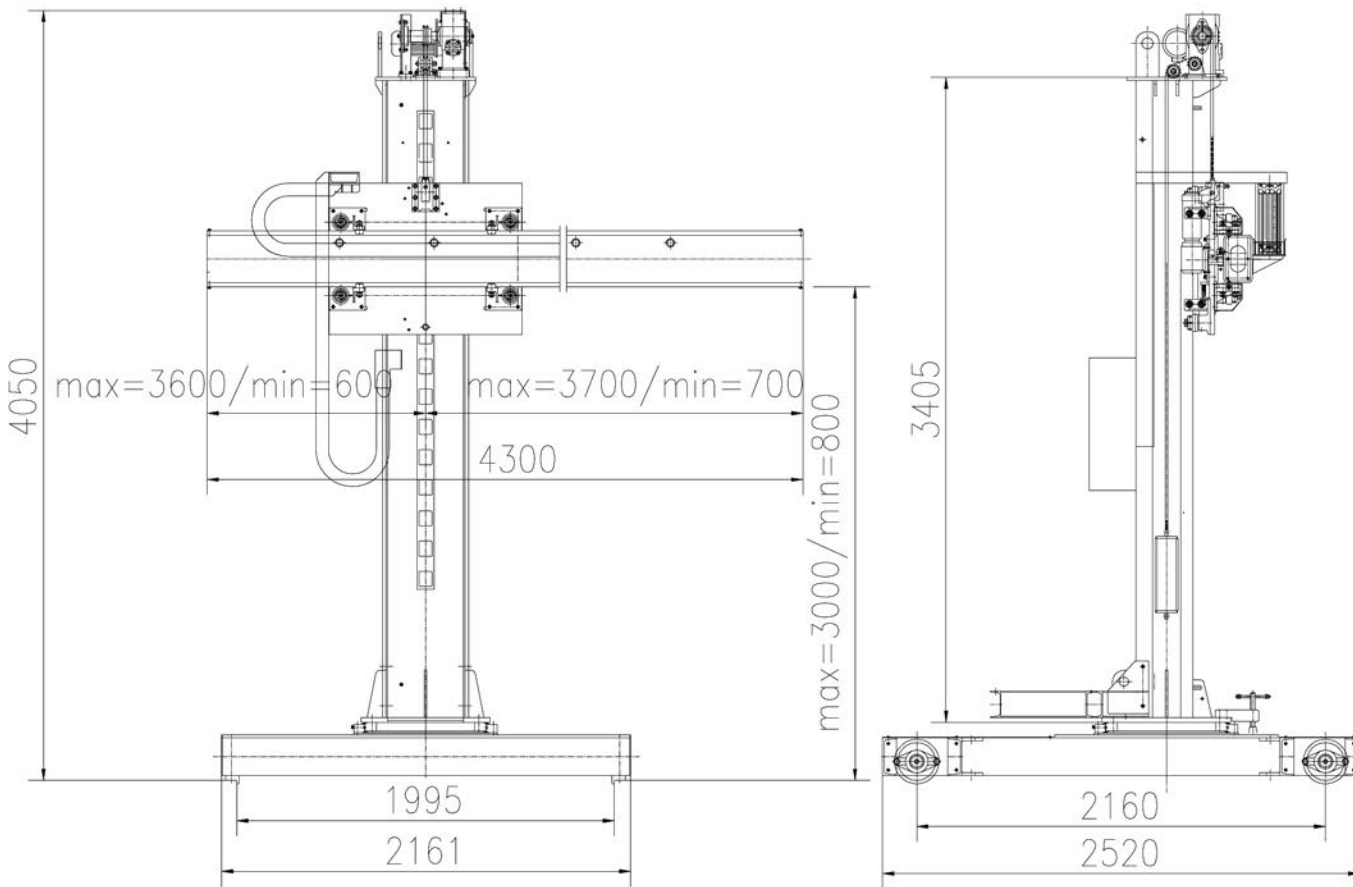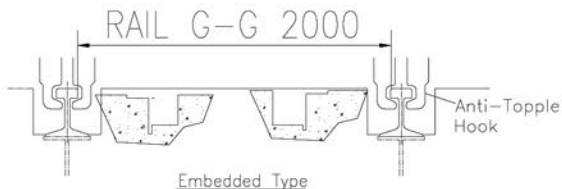

All dimensions in mm unless otherwise specified.

REV	DATE	DESCRIPTION	EDIT BY	REMARKS
CUSTOMER:				SCALE: N.T.S.
DRAWING NAME: <b>Medium Heavy Duty Manipulator</b>				 REVISION: <b>0</b>
DRAWING NO.: <b>MM3030-PT2000-WE</b>				
<small>THE ORIGINAL AND ALL COPIES OF THIS DOCUMENT TOGETHER WITH THE COPYRIGHT THEREOF ARE THE SOLE PROPERTY OF HARBACH MARKETING, INC. DESIGN AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE.</small>				SHEET: 1 OF 1



CUSTOMER APPROVAL

CHECKED BY:

DRAWN BY: IC

23-03-2011